


America - D (AMD)

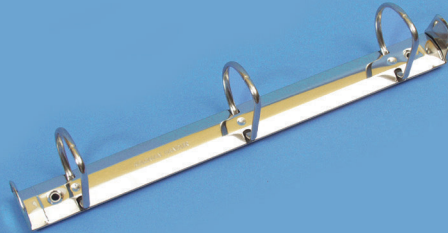

Combi-Mechanik Schienenausführung prismatisch Kipphebelöffnung Rückenleiste RLU auf Wunsch	D-ring mechanism Blade type prismatic Trigger-opening Backplate RLU on request	Mécanisme à anneaux D Mécanisme à plaques prismatique Ouverture à basculeur Contre-plaque RLU sur demande	Mecanismo de anillas mixtas Mecanismo de regleta prismático Abertura con pulsador Contraplaca RLU sobre pedido
A Blatthöhe B Ringanzahl C Ringdurchmesser (innen) D Gehäusebreite	A Sheet length B Number of rings C Ring diameter (internal) D Width of base	A Hauteur de feuille B Nombre des anneaux D C Diamètre intérieur des anneaux D Largeur de semelle	A Altura de la hoja B Número de anillas C Diámetro interior de las anillas D Ancho de la base

A / B / C (D)	ABC											kg /1000	m ³ /Karton	TM
AMD 216/03/30 (27)	D	70-70	30	36	41*	177,8	224,0	4,0 x 2,5	185	5.550	115,0	0,0388	KH	
AMD 216/03/35 (27)	D	70-70	35	39	46*	177,8	224,0	4,5 x 3,2	160	5.760	123,0	0,0360	KH	
AMD 216/03/40 (27)	D	70-70	40	42	53*	177,8	224,0	4,5 x 3,2	125	3.750	132,0	0,0388	KH	
AMD 216/03/45 (27)	D	70-70	45	44	57*	177,8	224,0	4,5 x 3,2	125	4.500	135,0	0,0360	KH	
AMD 280/03/30 (27)	D	108-108	30	36	41*	242,9	288,0	4,0 x 2,5	150	4.500	134,0	0,0432	KH	
AMD 280/03/35 (27)	D	108-108	35	39	46*	242,9	288,0	4,5 x 3,2	115	3.450	143,0	0,0432	KH	
AMD 280/03/40 (27)	D	108-108	40	42	53*	242,9	288,0	4,5 x 3,2	125	3.750	153,0	0,0432	KH	
AMD 280/03/45 (27)	D	108-108	45	44	57*	242,9	288,0	4,5 x 3,2	105	3.150	157,0	0,0432	KH	
AMD 297/04/30 (27)	D	80-80-80	30	36	41*	212,3	305,0	4,0 x 2,5	150	4.500	138,0	0,0432	KH	
AMD 297/04/35 (27)	D	80-80-80	35	39	46*	212,3	305,0	4,5 x 3,2	115	3.450	166,0	0,0432	KH	
AMD 297/04/40 (27)	D	80-80-80	40	42	53*	212,3	305,0	4,5 x 3,2	125	3.750	177,0	0,0432	KH	
AMD 297/04/50 (27)	D	80-80-80	50	47	63*	212,3	305,0	4,5 x 3,2	90	3.150	184,0	0,0432	KH	

* + 2 mm = Gesamteinbauhöhe / + 2 mm = total installation height

+ 2 mm = hauteur totale de l'installation / + 2 mm = altura total de la instalación